



Now you can see!

PROVISION ISR

PROFESSIONAL SECURITY PROVIDERS

Pro ((())) **Sec** ^{A/S}
PROFESSIONAL SECURITY
www.pro-sec.dk



GODE GRUNDE TIL AT VÆLGE PROVISION-ISR

ISRAELSK KNOWHOW OG PÅLIDELIGHED



PROVISION-ISR er et israelsk multinationalt selskab grundlagt i 2007 for at imødekomme kravene til produkter af høj kvalitet på det mellemste segment af CCTV-markedet.

Israel har oplevet terrortruslen i årtier, og af nødvendighed, er kommet til at udmærke sig indenfor national sikring. Mange israelske sikkerhedsproducenter udspringer fra en række specialer, herunder: nødforvaltning, cybersikkerhed, efterforskning, beskyttelse af kritisk infrastruktur, intelligente byer osv. Provision-ISR har specialiseret sig i avancerede markedsledende CCTV-løsninger.

"... Gennem kreativitet og innovation forvandlede vi golde ørkener til blomstrende marker og udforskede nye grænser inden for videnskab og teknologi."
Shimon Peres (Israels tidligere præsident)

MULIGHED FOR AT VÆLGE, HVAD DER ER BEDST FOR DIG



Provision-ISR's udvalg af produkter, omfatter forskellige kameraserier, der er specielt designet til at hjælpe installatorerne med at finde den bedst egnede løsning til deres kunder.

Vi er i stand til at opfylde behovene hos enhver form for kunde: fra dem, der søger en professionel CCTV linje, der er i stand til at garantere den bedste billedkvalitet, til dem, der leder efter den bedste pris.

"Giv ikke folk, hvad de vil have, og giv dem, hvad de har brug for."
Joss Whedon (amerikansk manuskriptforfatter)

DELING AF CCTV VIDEN



I dagens CCTV marked, hvor produkter og teknologier ændrer sig med få måneders mellemrum, er viden nøgleordet, og vi mener, at det er vores ansvar at levere oplysningerne hele vejen fra producenten gennem hele kæden - hele vejen til slutbruger.

Provision-ISR's tekniske specialister, frigiver en ny How-to-tutorial, hver gang en ny løsning lanceres.

Tekniske webinarer afholdes regelmæssigt for at opdatere Provision-ISR kunder om produktopgraderinger eller nye funktioner.

Sidst, men ikke mindst, afholdes Provision-ISR roadshows, seminarer, kurser og workshops sted verden rundt for at støtte distributører, underdistributører og installatører.

"Viden er magt. Information er befriende. Uddannelse er udgangspunktet for fremskridt i alle samfund."
Kofi Annan (tidligere ghanesisk diplomat)

ENKEL OG INTUITIV SOFTWARE OG APPLIKATIONER



Ifølge Provision-ISR's filosofi bør "avanceret" ikke betyde "komplikeret".

Derfor er vores israelske ingeniørers mål at udvikle avancerede softwareløsninger (særligt videoanalyse) og at holde brugergrænsefladen enkel og intuitiv.

"Enkelhed er det ultimative raffinement."
Leonardo da Vinci (renæssancemaler, videnskabsmand og opfinder)

BRAND FILOSOFI



Fra starten af har Provision-ISR's faglige etik ført virksomheden til at "beskytte" alle aktører i forsyningskæden, fra den store distributør til den lille installatør, samt respektere professionalismismen hos hvert enkelt led.

I Provision-ISR's øjne har hvert led (producent, distributør, installatør og slutbruger) sin egen rolle i kæden og gør det perfekt. Både distributørerne og installatørerne, der vælger Provision-ISR, skal føle sig trygge ved brandet. Dagligt demonstrerer Provision-ISR sin tilgang til opgaven med konkrete handlinger: som eksempel er Provision-ISR, ulig andre forhandlere, imod online salg.

"Den bedste måde at finde ud af, om du kan stole på nogen er at stole på dem."
Ernest Hemingway (Nobelprisvinder for litteratur)

KOMPATIBILITET MED ANDRE MÆRKERS ENHEDER



Vi mener, at installatøren ikke bør tvinges til at vælge mellem mærker eller teknologier. Derfor er Provision-ISR løsninger designet til at være kompatible med andre mærkers.

"I want to break free."
Queen (britisk rockband)

OPMÆRKSOMHED PÅ DE NYESTE TEKNOLOGI TENDENSER



Provision-ISR softwareudviklere, er altid på forkant med den teknologiske udvikling.

Vores software og apps følger de nyeste trends på teknologimarkedet, såsom: virtual reality, gaming, deling på sociale netværk og berøringsbevægelse.

"Vi lever i en tid med forbløffende teknologiske fremskridt. Der er dybhavsdroner og live-streaming virtual reality."
Jenna Wortham (Prisvindende journalist for The New York Times)

TILGÆNGELIGHED AF TILBEHØR DESIGNET TIL CCTV MARKED



Provision-ISR tilbyder en "One-Stop-Shop" der dækker alle CCTV produktbehov.

Vores sortiment af produkter omfatter en komplet serie af testet og pålideligt tilbehør, hvoraf meget er specielt designet til CCTV markedet! CCTV mode på Provision-ISR PoE-switches er blot et eksempel på ovennævnte.

"Jeg er stor tilhænger af, at tilbehør kan gøre forskellen på et "look""
Nina Garcia (colombiansk modejournalist, chefredaktør for Elle magazine)

MINI DOME / FISH-EYE KAMERA

DMA-250IP528

varenr. 56580



5MP 1/2.5" CMOS Eye-Sight H.265

- Real-Time 30fps
- 2.8mm Fixed Lens (107°)
- Built-In Microphone
- IR 10M
- Junction box: PR-B05DWB
PR-B10BJB



FEI-360IP5

varenr. 56613



6MP 1/2.9" CMOS H.265

- Real-Time 30fps
- 1.07 mm Lens (360°)
- Built-In Microphone
- IR 15M
- Junction box: PR-B50JB

TRÅDLØSE KAMERA

I3-390WIP536

varenr. 56614



2MP 1/3" CMOS H.265

- 3,6 mm Lens
- IR 30M
- Must be paired with WR-04IPC Unit
- Water proof
- 173,5 x 65,5 x 62,0 mm

WR-04IPC

varenr. 56615



RECEIVER

- Capacity 4 wireless IPC
- 5 status LED, 4 status LED IPC, 1 status LED NVR.
- 1 x RJ45 100Mbps network interface
- 1 x Match/Reset button
- 1 x 12V power supply
- 186,0 x 74,0 mm

PTZ / SPEED DOME KAMERA

I5PT-390IPX4-P

varenr. 56610



2MP 1/2.9" CMOS IP PTZ

- Real-Time 30fps
- 2,8-12 mm Motorized VF (4 x zoom) with Auto Focus
- IR 50M
- 250° Pan / 65° Tilt (12°/sec)
- 225 x 175 x 94 mm
- PSU included

Z-20IPE-2(IR)

varenr. 56612



2MP 1/2.8" CMOS IP PTZ

- Real-Time 30fps
- 3,5-97mm (20 x zoom)
- IR 100M
- Auto Tracking
- 360° Pan / 180° Tilt (350°/sec)
- 354 x 341 x 228 mm
- PSU included

MZ-20IP-2(IR)

varenr. 56611



2MP 1/2.8" CMOS IP PTZ

- Real-Time 30fps
- 3,5-97mm (20 x zoom)
- IR 80M
- 360° Pan / 180° Tilt (120°/sec)
- 218 x 199 x 136 mm
- PSU included



VIDEO ANALYTICS:

Camera tampering, line crossing, sterile area, object monitoring, people intrusion, people gathering, people counting, smart search, face detection.

S-SIGHT V2 SERIE



DI-320IPS-28
varenr. 56561



- 2MP S-SIGHT (V2) 1/2.9" CMOS
- 2.8mm (107°)
 - 20m (1 High Power IR LED)
 - Built-In Microphone
 - Junction box: PR-JB12IP66
PR-JB12IP64
PR-WB-A
PR-B45JB+



DI-320IPS-VF
varenr. 56562



- 2MP S-SIGHT (V2) 1/2.9" CMOS
- 2.8-12mm (88°-34.8°)
 - 40m (3 High Power IR LED)
 - Built-In Microphone
 - Junction box: PR-JB14IP66
PR-JB14IP64
PR-WB-A
PR-B45JB+



I2-320IPS-28
varenr. 56521



- 2MP S-SIGHT (V2) 1/2.9" CMOS
- 2.8mm (107°)
 - 20m (1 High Power IR LED)
 - Built-In Microphone
 - Junction box: PR-JB12IP66
PR-JB12IP64
PR-B45JB+



I4-320IPS-VF
varenr. 56522



- 2MP S-SIGHT (V2) 1/2.9" CMOS
- 2.8-12mm (94°-35.7°)
 - 40m (2 High Power IR LED)
 - Built-In Microphone
 - Junction box: PR-JB12IP66
PR-JB12IP64
PR-B55JB+



DI-340IPS-28
varenr. 56563



- 4MP S-SIGHT (V2) 1/2.7" CMOS
- 2.8mm (110°)
 - 20m (1 High Power IR LED)
 - Built-In Microphone
 - Junction box: PR-JB12IP66
PR-JB12IP64
PR-WB-A
PR-B45JB+



DI-340IPS-MVF
varenr. 56564



- 4MP S-SIGHT (V2) 1/2.7" CMOS
- 2.8-12mm (94°-35.7°)
 - Motorized VF with Auto Focus
 - 40m (3 High Power IR LED)
 - Built-In Microphone
 - Junction box: PR-JB14IP66
PR-JB14IP64
PR-WB-A
PR-B45JB+



I2-340IPS-28
varenr. 56531



- 4MP S-SIGHT (V2) 1/2.7" CMOS
- 2.8mm (110°)
 - 20m (1 High Power IR LED)
 - Built-In Microphone
 - Junction box: PR-JB12IP66
PR-JB12IP64
PR-B45JB+



I4-340IPS-MVF
varenr. 56532



- 4MP S-SIGHT (V2) 1/2.7" CMOS
- 2.8-12mm (94°-35.7°)
 - Motorized VF with Auto Focus
 - 40m (3 High Power IR LED)
 - Built-In Microphone
 - Junction box: PR-JB12IP66
PR-JB12IP64
PR-B55JB+



VIDEO ANALYTICS:
Basic Camera Tampering, Line Crossing, Sterile Area

EYE-SIGHT V2 SERIE



DI-320IPE-28
varenr. 56581



- 2MP EYE-SIGHT (V2) 1/2.8" CMOS
- 2.8mm (110°)
 - 20m (1 High Power IR LED)
 - Built-In Microphone
 - Starlight sensor
 - Junction box: PR-JB12IP66
PR-JB12IP64
PR-WB-A
PR-B45JB+



DI-320IPE-MVF
varenr. 56582



- 2MP EYE-SIGHT (V2) 1/2.8" CMOS
- 2.8-12mm (103°-32°)
 - Motorized VF with Auto Focus
 - 40m (3 High Power IR LED)
 - Built-In Microphone
 - Starlight sensor
 - Junction box: PR-JB14IP66
PR-JB14IP64
PR-WB-A



DI-340IPE-28
varenr. 56584



- 4MP EYE-SIGHT (V2) 1/3" CMOS
- 2.8mm (100°)
 - 20m (1 High Power IR LED)
 - Built-In Microphone + Audio Input
 - Junction box: PR-JB12IP66
PR-JB12IP64
PR-WB-A
PR-B45JB+



DI-340IPE-MVF
varenr. 56585



- 4MP EYE-SIGHT (V2) 1/3" CMOS
- 2.8-12mm (94.3°-29.9°)
 - Motorized VF with Auto Focus
 - 40m (3 High Power IR LED)
 - Built-In Microphone + Audio Input
 - Junction box: PR-JB14IP66
PR-JB14IP64
PR-WB-A



I4-340IPE-36
varenr. 56570



- 4MP EYE-SIGHT (V2) 1/3" CMOS
- 3.6mm (80.6°)
 - 40m (2 High Power IR LED)
 - Audio Input
 - Junction box: PR-JB12IP66
PR-JB12IP64
PR-B55JB+



I4-340IPE-MVF
varenr. 56571



- 4MP EYE-SIGHT (V2) 1/3" CMOS
- 2.8-12mm (94.3°-29.9°)
 - Motorized VF with Auto Focus
 - 40m (2 High Power IR LED)
 - Audio Input
 - Junction box: PR-JB12IP66
PR-JB12IP64
PR-B55JB+



DAI-340IPE-MVF
varenr. 56583



- 4MP EYE-SIGHT (V2) 1/3" CMOS
- 2.8-12mm (94.3°-29.9°)
 - Motorized VF with Auto Focus
 - 40m (1 High Power IR LED)
 - Built-in Microphone + Audio Input + Audio Output
 - Junction box: PR-JB14IP66



VIDEO ANALYTICS:
DDA + Face Detection

NVR 4 - 8 - 16 - 32 - 64 CH

NVR5-4100PX+(MM)

varenr. 56500



- 4CH PoE 5MP at 25fps, H.265
- Input: 4 Channel (Via PoE/Network)
- Output: HDMI/VGA (1080P, 1280x1024, 1024x768)
- 1 HDD up to 6TB
- 100Mbps Network
- Mini metal case

NVR5-8200PX+(MM)

varenr. 56505



- 8CH PoE 5MP at 25fps, H.265
- Input: 8 Channel (Via PoE/Network)
- Output: HDMI/VGA (1080P, 1280x1024, 1024x768)
- 1 HDD up to 6TB
- 100Mbps Network
- Mini metal case

NVR8-8200PFA

varenr. 56506



- 8CH 8MP at 25fps, H.265
- Input: 8 Channel (Via PoE/Network)
- Output: HDMI(4K), VGA
- 1 HDD up to 8TB
- Audio In/Out • 1000Mbps Network
- Face recognition support
- DDA analytics support

NVR8-16400PFA (1U)

varenr. 56510



- 16CH 8MP at 25fps, H.265
- Input: 16 Channel (Via PoE/Network)
- Output: HDMI(4K), VGA
- HDD up to 8TB
- Audio In/Out • 1000Mbps Network
- Face recognition support
- DDA analytics support

NVR8-32800F(1U)

varenr. 56513



- 32CH 8MP at 25fps, H.265
- Input: 32 Channel (Via Network)
- Output: HDMI(4K), VGA
- 2 HDD up to 8TB
- Audio In/Out • 1000Mbps Network
- 1U case
- Face recognition support
- DDA analytics support

NVR8-32800F-16P(2U)

varenr. 56514



- 32CH 8MP at 25fps, H.265
- Input: 16 Channel (Via Network) + 16 Channel (Via PoE/Network)
- Output: HDMI(4K), VGA
- 8 HDD up to 8TB
- Audio In/Out • Alarm In/Out • 1000Mbps Network
- 2U case
- Face recognition support
- DDA analytics support

NVR8-641600R(2U)

varenr. 56517



RAID
support

- 64CH 8MP at 25fps, H.265
- Input: 64 Channel (Via Network)
- Output: HDMIx2(4K), VGA
- 8 HDD up to 8TB + RAID
- Audio In/Out • Alarm In/Out • 2x1000Mbps Network
- 2U case

ECO / PRO SERIE



DI-390A28+
varenr. 56062



- 2MP PRO 1/3" CMOS
- 4in1 (AHD / CVI / TVI / CVBS + PAL/NTSC)
- 2.8mm Fixed Lens (105°)
- 2 Array LED (15M)
- 103,9 x 81,7 mm
- Junction box: PR-B37JB
PR-B42PJB
PR-B45JB



DI-390AVF W/G
varenr. 56063 / 56064



- 2MP PRO 1/3" CMOS
- 4in1 (AHD / CVI / TVI / CVBS + PAL/NTSC)
- 2.8-12mm Vari-Focal Lens (95-25°)
- 3 Array LED (25M)
- 129,5 x 104,0 mm
- Junction box: PR-B47JB+
PR-B55JB



DI-390AMVF
varenr. 56065



- 2MP PRO 1/3" CMOS
- 4in1 (AHD / CVI / TVI / CVBS + PAL/NTSC)
- 2.8-12mm (92°-29°)
- Motorized VF with Auto Focus
- 3 Array LED (25M)
- 129,5 x 104 mm
- Junction box: PR-B47JB+
PR-B55JB



I3-390A28
varenr. 56021



- 2MP PRO 1/3" CMOS
- 4in1 (AHD / CVI / TVI / CVBS + PAL/NTSC)
- 2.8mm Fixed Lens (96°)
- 3 Array LED (30M)
- 206,5 x 67,6 mm
- Junction box: PR-B37JB
PR-B45JB



I4-390AVF W/G
varenr. 56022 / 56023



- 2MP PRO 1/3" CMOS
- 4in1 (AHD / CVI / TVI / CVBS + PAL/NTSC)
- 2.8-12mm Vari-Focal Lens (95°-25°)
- 4 Array LED (40M)
- 286 x 77 mm
- Junction box: PR-B47JB+
PR-B45JB



I4-390AMVF
varenr. 56025



- 2MP PRO 1/3" CMOS
- 4in1 (AHD / CVI / TVI / CVBS + PAL/NTSC)
- 2.8-12mm (92°-29°)
- Motorized VF with Auto Focus
- 4 Array LED (40M)
- 286 x 77 mm
- Junction box: PR-B47JB+
PR-B45JB



DI-350A28
varenr. 56081



- 5MP PRO 1/2.7" CMOS
- 4in1 (AHD / CVI / TVI / CVBS + PAL/NTSC)
- ICR (True Day & Night)
- 2.8mm Fixed Lens (91°)
- 2 Array LED (20M)
- 103,9 x 81,7 mm
- Junction box: PR-B37JB
PR-B42PJB
PR-B45JB



DI-350AVF+
varenr. 56082



- 5MP PRO 1/2.7" CMOS
- 4in1 (AHD / CVI / TVI / CVBS + PAL/NTSC)
- ICR (True Day & Night)
- 2.8-12mm VF Lens (91°-25°)
- 3 Array LED (25M)
- 129,5 x 104 mm
- Junction box: PR-B47JB+
PR-B55JB

HD TEKNOLOGI

PRO SERIE



I3-350A28
varenr. 56071



- 5MP PRO 1/2.7" CMOS
- 4in1 (AHD / CVI / TVI / CVBS + PAL/NTSC)
 - 2.8mm Fixed Lens (92°)
 - 3 Array LED (30M)
 - 206,5 x 67,7 mm
 - Junction box: PR-B37JB
PR-B45JB



I4-350AVF+
varenr. 56072



- 5MP PRO 1/2.7" CMOS
- 4in1 (AHD / CVI / TVI / CVBS + PAL/NTSC)
 - 2.8-12mm VF Lens (91°-25°)
 - 4 Array LED (40M)
 - 286 x 77,7 mm
 - Junction box: PR-B47JB+
PR-B45JB



DI-280AMVF
varenr. 56085



- 8MP ECO 1/2.5" CMOS
- 4in1 (AHD / CVI / TVI / CVBS + PAL/NTSC)
 - 2.7-13.5mm Motorized VF with Auto Focus
 - 24 IR LED (15M)
 - 129,5 x 104 mm
 - Junction box: PR-B47JB

FULD FARVE NAT KAMERA



DVL-391AS36
varenr. 56107



- 2MP SIRIUS 1/2.8" CMOS
- 4in1 (AHD / CVI / TVI / CVBS + PAL/NTSC)
 - 3.6mm F1.0 (87°)
 - 2 White LED (Off/Adaptive/Full)
 - 103,9 x 81,7 mm
 - Junction box: PR-B37JB



TVL-391AS36
varenr. 56106



- 2MP SIRIUS 1/2.8" CMOS
- 4in1 (AHD / CVI / TVI / CVBS + PAL/NTSC)
 - 3.6mm F1.0 (87°)
 - 2 White LED (Off/Adaptive/Full)
 - 206,5 x 67,7 mm
 - Junction box: PR-B37JB

PTZ KAMERA



I5PT-390AX10
varenr. 56100



- 2MP PTZ 1/3" CMOS
- 4in1 (AHD / CVI / TVI / CVBS + PAL/NTSC)
 - Optical zoom 10X / 5,1-52mm
 - Array LED (50M)
 - 250° Pan / 65° Tilt (12°/sec)
 - 225 x 175 x 94 mm
 - PSU included

DVR / Hybrid 4 - 8 - 16 - 32 CH

SH-4050A5-5L (MM)

varenr. 56001



5MP Lite

"All in 1" Hybrid (AHD / CVI / TVI / CVBS + IP)

- Input: 6CH total (0-4 AHD / 0-6 IP Over Network)
- Output: HDMI(1920x1080)
VGA (1280x1024, 1024x768), CVBS(Spot)
- Audio In/Out
- 1 HDD up to 8TB
- Mini metal case

SH-4050A5-8L(MM)

varenr. 56002



8MP Lite

"All in 1" Hybrid (AHD / CVI / TVI / CVBS + IP)

- Input: 6CH total (0-4 AHD / 0-6 IP Over Network)
- Output: HDMI(1920x1080)
VGA (1280x1024, 1024x768), CVBS(Spot)
- Audio In/Out
- 1 HDD up to 8TB
- Mini metal case

SH-8100A5-5L(MM)

varenr. 56005



5MP Lite

"All in 1" Hybrid (AHD / CVI / TVI / CVBS + IP)

- Input: 12CH total (0-8 AHD / 0-12 IP Over Network)
- Output: HDMI(1920x1080)
VGA (1280x1024, 1024x768), CVBS(Spot)
- Audio In/Out
- 1 HDD up to 8TB
- Mini metal case

SH-8100A5-8L(MM)

varenr. 56006



4K

8MP Lite

"All in 1" Hybrid (AHD / CVI / TVI / CVBS + IP)

- Input: 16CH total (0-8 AHD / 0-16 IP Over Network)
- Output: HDMI1: 4K HDMI2: 1920x1080 (1080P)
VGA: 1280x1024, 1024x768 CVBS (spot)
- Audio In/Out
- 1 HDD up to 8TB
- Mini metal case

SH-16200A5-5L(1U)

varenr. 56010



5MP Lite

"All in 1" Hybrid (AHD / CVI / TVI / CVBS + IP)

- Input: 24CH total (8-16 AHD / 8-16 IP Over Network)
- Output: HDMI(1920x1080)
VGA (1280x1024, 1024x768), CVBS(Spot)
- Audio In/Out
- 2 HDD up to 8TB + 1 ESATA port
- 1U case

SH-16200A5-8L(1U)

varenr. 56011



4K

8MP Lite

"All in 1" Hybrid (AHD / CVI / TVI / CVBS + IP)

- Input: 24CH total (8-16 AHD / 8-16 IP Over Network)
- Output: HDMI1: 4K HDMI2: 1920x1080 (1080P)
VGA: 1280x1024, 1024x768 CVBS (spot)
- Audio In/Out
- Alarm 16 In 4 Out
- 3 HDD up to 8TB
- 1U case

SH-32400A5-5L(1.5U)

varenr. 56013



5MP Lite

"All in 1" Hybrid (AHD / CVI / TVI / CVBS + IP)

- Input: 40CH total (24-32 AHD / 8-16 IP Over Network)
- Output: HDMI(1920x1080)
VGA (1280x1024, 1024x768), CVBS(Spot)
- Audio In/Out
- Alarm 16 In 4 Out
- 4 HDD up to 8TB
- 1.5U case

ONE STOP SHOP

Provision-ISR er en One-Stop-Shop til alle CCTV produktbehov. Vi har formået at skabe et komplet sortiment af CCTV tilbehør (skærme, strømforsyninger, beslag, samledåser, stik, baluner ...) der matcher alle typer af CCTV installationer. Vi forstår behovet for testet og pålideligt CCTV tilbehør og sætter høje kvalitetsstandarder for alle produkter.

SWITCH

PoES-0460C+2I

varenr. 56680



- Downlink: 4x100Mbps Ports
- Uplink: 2x 100Mbps Port
- 60 Watt (Avg:15W Max: 30W Per CH)
- CCTV mode (up to 250 meter)

PoES-08120C+2I

varenr. 56681



- Downlink: 8x100Mbps Ports
- Uplink: 2x 100Mbps Port
- 120 Watt (Avg:15W Max: 30W Per CH)
- CCTV mode (up to 250 meter)

PoES-16200C+2G

varenr. 56682



- Downlink: 16x100Mbps Ports
- Uplink: 2x 1Gbps port
- 200 Watt (Avg:15W Max: 30W Per CH)
- CCTV mode (up to 250 meter)
- Rack mount bracket included

POE TILBEHØR

PoEI-0130

varenr. 56690



- Downlink: 1x 100 Mbps
- Output: PoEI-0130 max 30W - PoEI-0160 max 60W
- Internal power supply
- Complies with IEEE802.3 at PoE
- Distance: up to 100 meters
- Built-in surge protection

PoER-01

varenr. 56691



- Extends PoE Ethernet range up to additional 100 meter 10/100Mbps Ethernet
- No additional power supply is required
- Automatically detects and protects PoE equipment from being damaged by incorrect installation
- Complies with IEEE802.3 at PoE

EoC-01

varenr. 56692



- Set-Transmitter + Receiver
- Up To 150 Meter of Ethernet Over Standard Coax Cable (RG-59)
- Passive Units: No Power supply needed
- Requires that the camera will be powered on

HDMI TILBEHØR

PR-HDEx(4K)

varenr. 56141



- HDMI Repeater
- Supports: all HD format up to 4K @ 30 fps.
 - Support HDMI 1.4b
 - Support up to 40 meters total transmission distance (AWG 26 cable standard)
 - 1080P resolution: Input: up to 15 meters, Output: up to 25 meters
 - 4K resolution: Input: up to 5 meters, Output: up to 8 meters

PR-SP102(4K)

varenr. 56142



- 1 To 2 HDMI Splitter
- Support HDMI resolution up to 4K@30Hz
 - Support digital audio format: DTS-HD/Dolby-true HD/ DTS/Dolby-AC3/DSD/HD(HBR)
 - Supported HDMI cable distance: (AWG 26 cable standard)
 - 1080P resolution: Input: up to 15 meters. Output: up to 15 meters.
 - 4K resolution: Input: up to 8 meters. Output: up to 8 meters
 - DC5V power supply needed (USB Power cable included)

PR-HDoNet+

varenr. 56143



- HDMI over Network Extender
- Transmit HDMI signal over Ethernet cable
 - Working distance: Up to 40m distance over cat5e cable.
 - Up to 60m over Cat6 cable
 - HDMI 1.3&3D support
 - 12Bit deep color and bandwidth of up to 225Mhz support
 - Support video resolution of up to 1080P@60Hz
 - Supported Audio formats: DTS-HD/Dolby-true HD/LPCM7.1/DTS/Dolby-AC3/DSD
 - C5V power supply included

STRØMFORSYNINGER

PR-12V1A-A
varenr. 56150



Power supply 12V 1A

PR-12V5A-4
varenr. 56151



Power supply 12V 5A
+ 4 SPLITTER

PR-10A9CH-B
varenr. 56152



9CH Power Supply
12V 10A with power socket
Battery up to 17 Ah - 9 PORTS

PR-20A16CH (1U)
varenr. 56153



16CH Power Supply
12V 20A - 1U CASE
16 PORTS

BALUNER

PTR-101V-HD+
varenr. 56168



1CH HD VIDEO PASSIVE BALUN
1Ch Set
4MP 4in1 support: AHD / CVI / TVI / CVBS Passive -
No Power Required
Minimal Attenuation
Light Weight

PTR-102VP-HD+
varenr. 56169



1CH HD VIDEO + POWER PASSIVE BALUN
1Ch Set
5MP 4in1 support: AHD / CVI / TVI / CVBS Passive
Minimal Attenuation
Light Weight

PTR-401V-HD
varenr. 56170



4CH HD passive balun
4Ch Unit
5MP 4in1 support: AHD / CVI / TVI / CVBS
Passive - No Power Required
Surge Protection
Minimal Attenuation
Light Weight

MONITOR

PR-IPS10P-W 10" TFT monitor
varenr. 56145



ULTRA THIN

TFT109" DIGITAL MONITOR

- Screen Size: 10" TFT Screen
- Ultra thin design
- Touch Buttons
- Ultra High Resolution: 1024x600
- 4CH Video in (AV1/AV2/HDMI/VGA)
- TV System: PAL / NTSC
- Power Supply: DC 12V, 1A
- Video Input: 1VP-P, 75Ohm
- Inputs: AV1, AV2, VGA, HDMI, Power
- Work Temperature: -10°C ~ 60°C
- Viewing Angle: 85° (all directions)
- Contrast Ratio: 300:1
- Brightness: 350CD/m2
- Weight: 1.2Kg
- Dimension: 250W x 163H x 16D mm

BESLAG OG SAMLEDÅSER

PR-B45JB
varenr. 56646



Small water-proof junction box suitable for bullet and dome Fixed Lens Camera

PR-B55JB
varenr. 56647



Large water-proof junction box suitable for bullet and dome Vari-Focal Cameras

PR-B37JB
varenr. 56644



SMALL junction box suitable for AHA and IP Fixed Lens cameras (I1/I3-XXXAHD36 / DI-XXXAHD36)

PR-B47JB2
varenr. 56645



LARGE junction box suitable for AHD and IP Vari-Focal cameras (Es. I3/I4-xxxAHDxx / DI-xxxIPxVF)

PR-B50JB
varenr. 56648



Junction box suitable for FEI-xxx

PR-B10SB+
varenr. 56641



Straight bracket for junction box

PR-B10LB+
varenr. 56642



"L" shaped bracket for junction box

PR-B10EX
varenr. 56643



10 cm extension for junction box

STIK

PR-C03
varenr. 56160



"T" CONNECTOR
BNC male to 2 BNC female

PR-C04
varenr. 56161



CONNECTOR
BNC female to RCA male

PR-C07
varenr. 56162



CONNECTOR
BNC female to BNC female

PR-C08
varenr. 56163



CONNECTOR
DC jack male

PR-C09
varenr. 56164



CONNECTOR
DC jack female

PR-C12L
varenr. 56165



BNC PLUG

PR-C13
varenr. 56166




BNC PLUG
(one set with three pcs) for ratchet BNC cramping tool.

PR-C14
varenr. 56167



DC SPLITTER 1-4

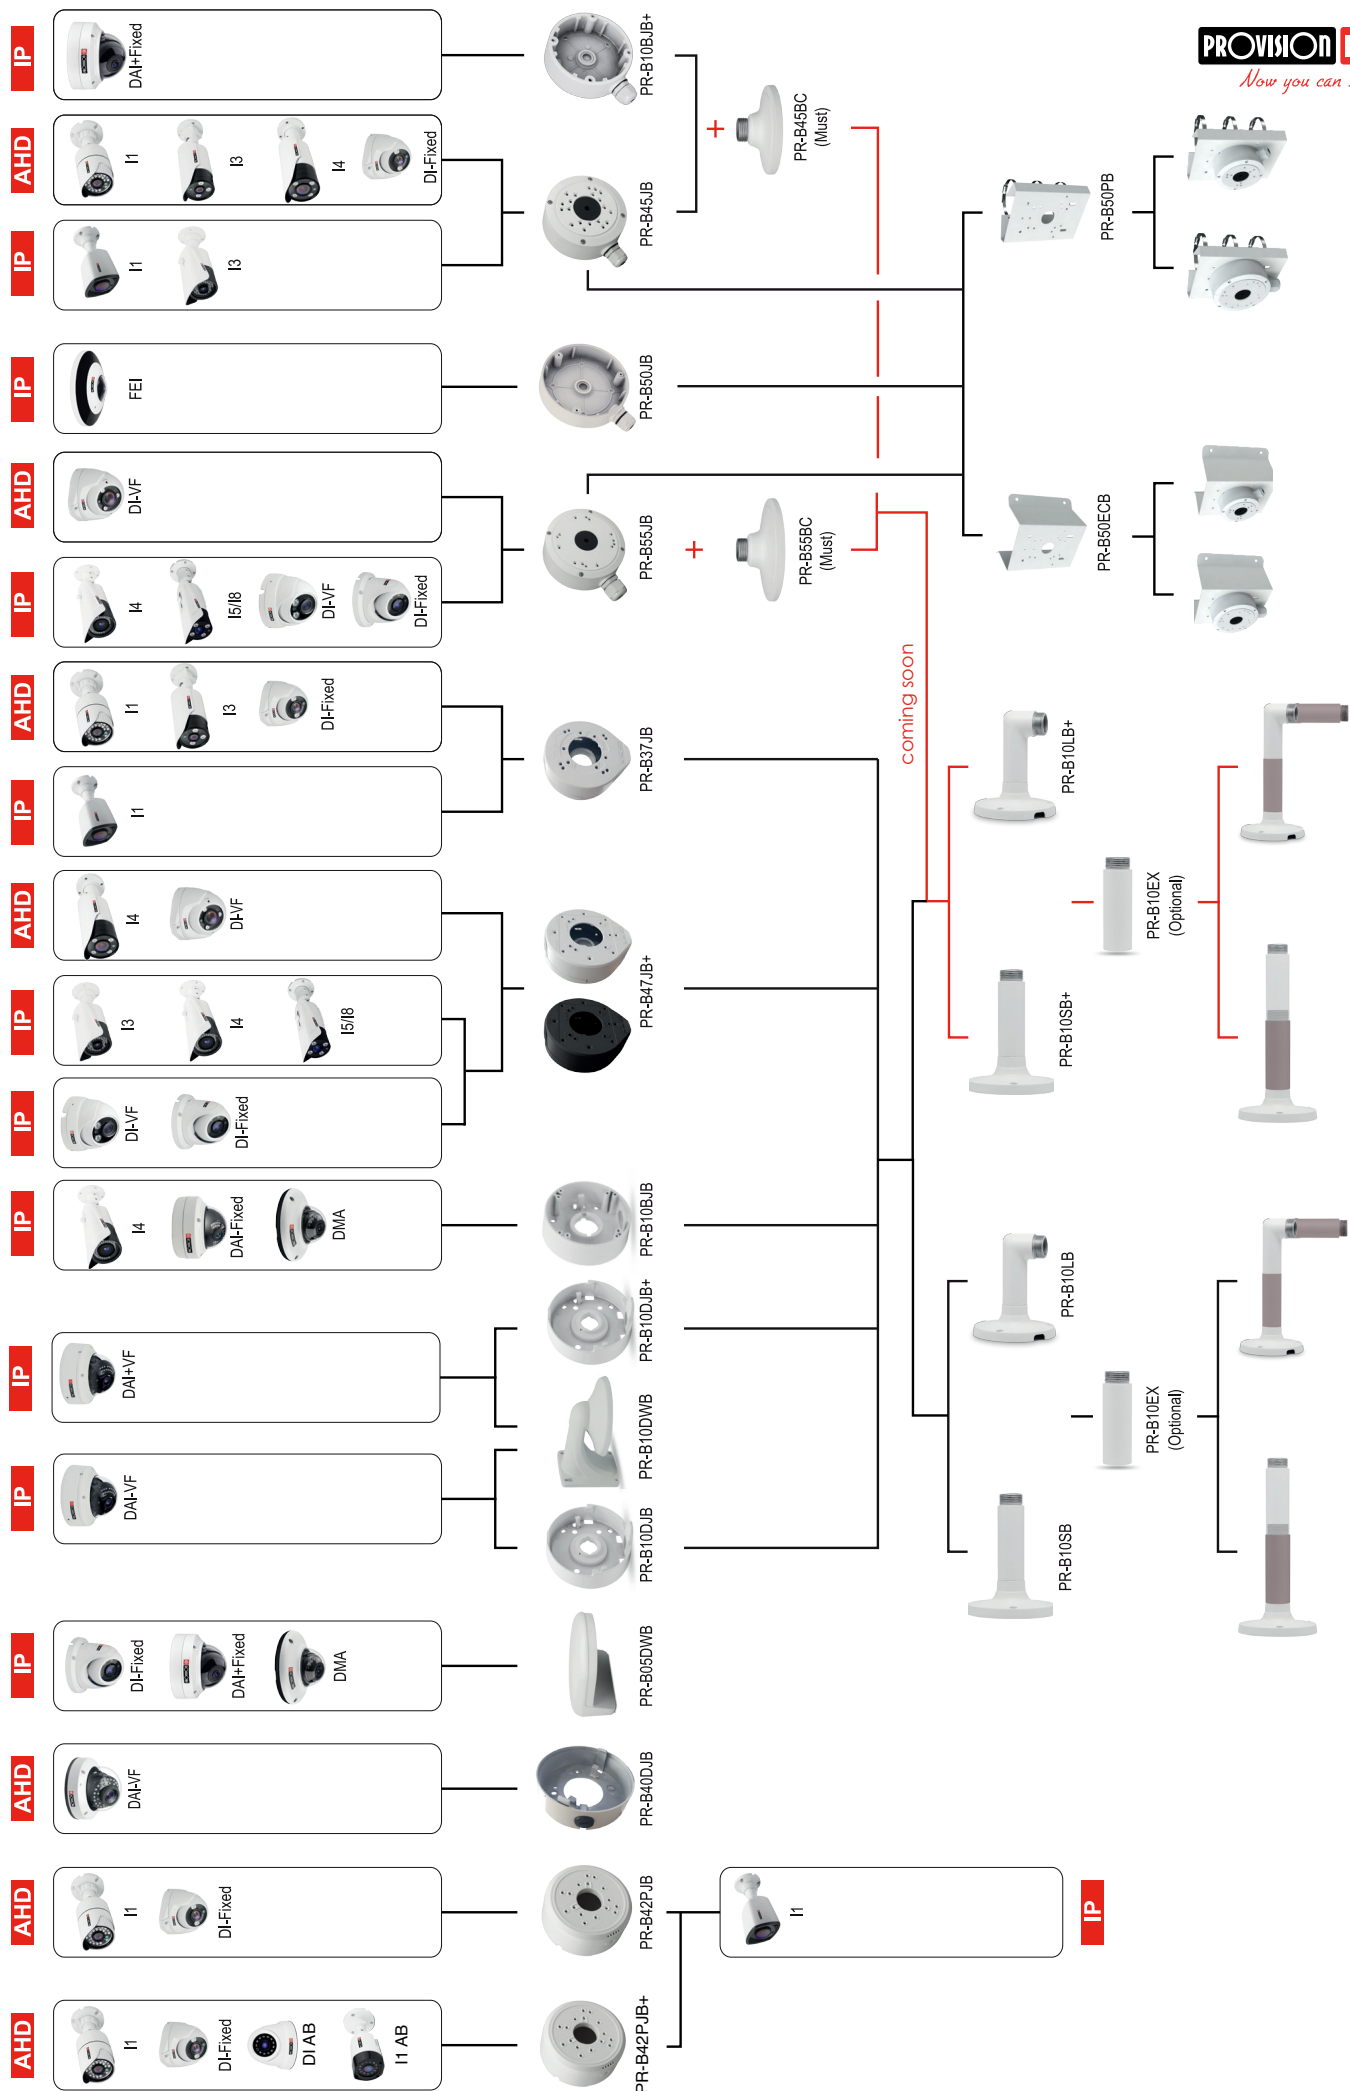

[illegible]



Now you can see!

www.provision-isr.com

Pro (tr.) **Sec** ^{A/S}
PROFESSIONAL SECURITY

Egegårdsvej 11,
DK 4621 Gadstrup
CVR nr.: 89975816

Telefon: 56 130 630

www.pro-sec.dk